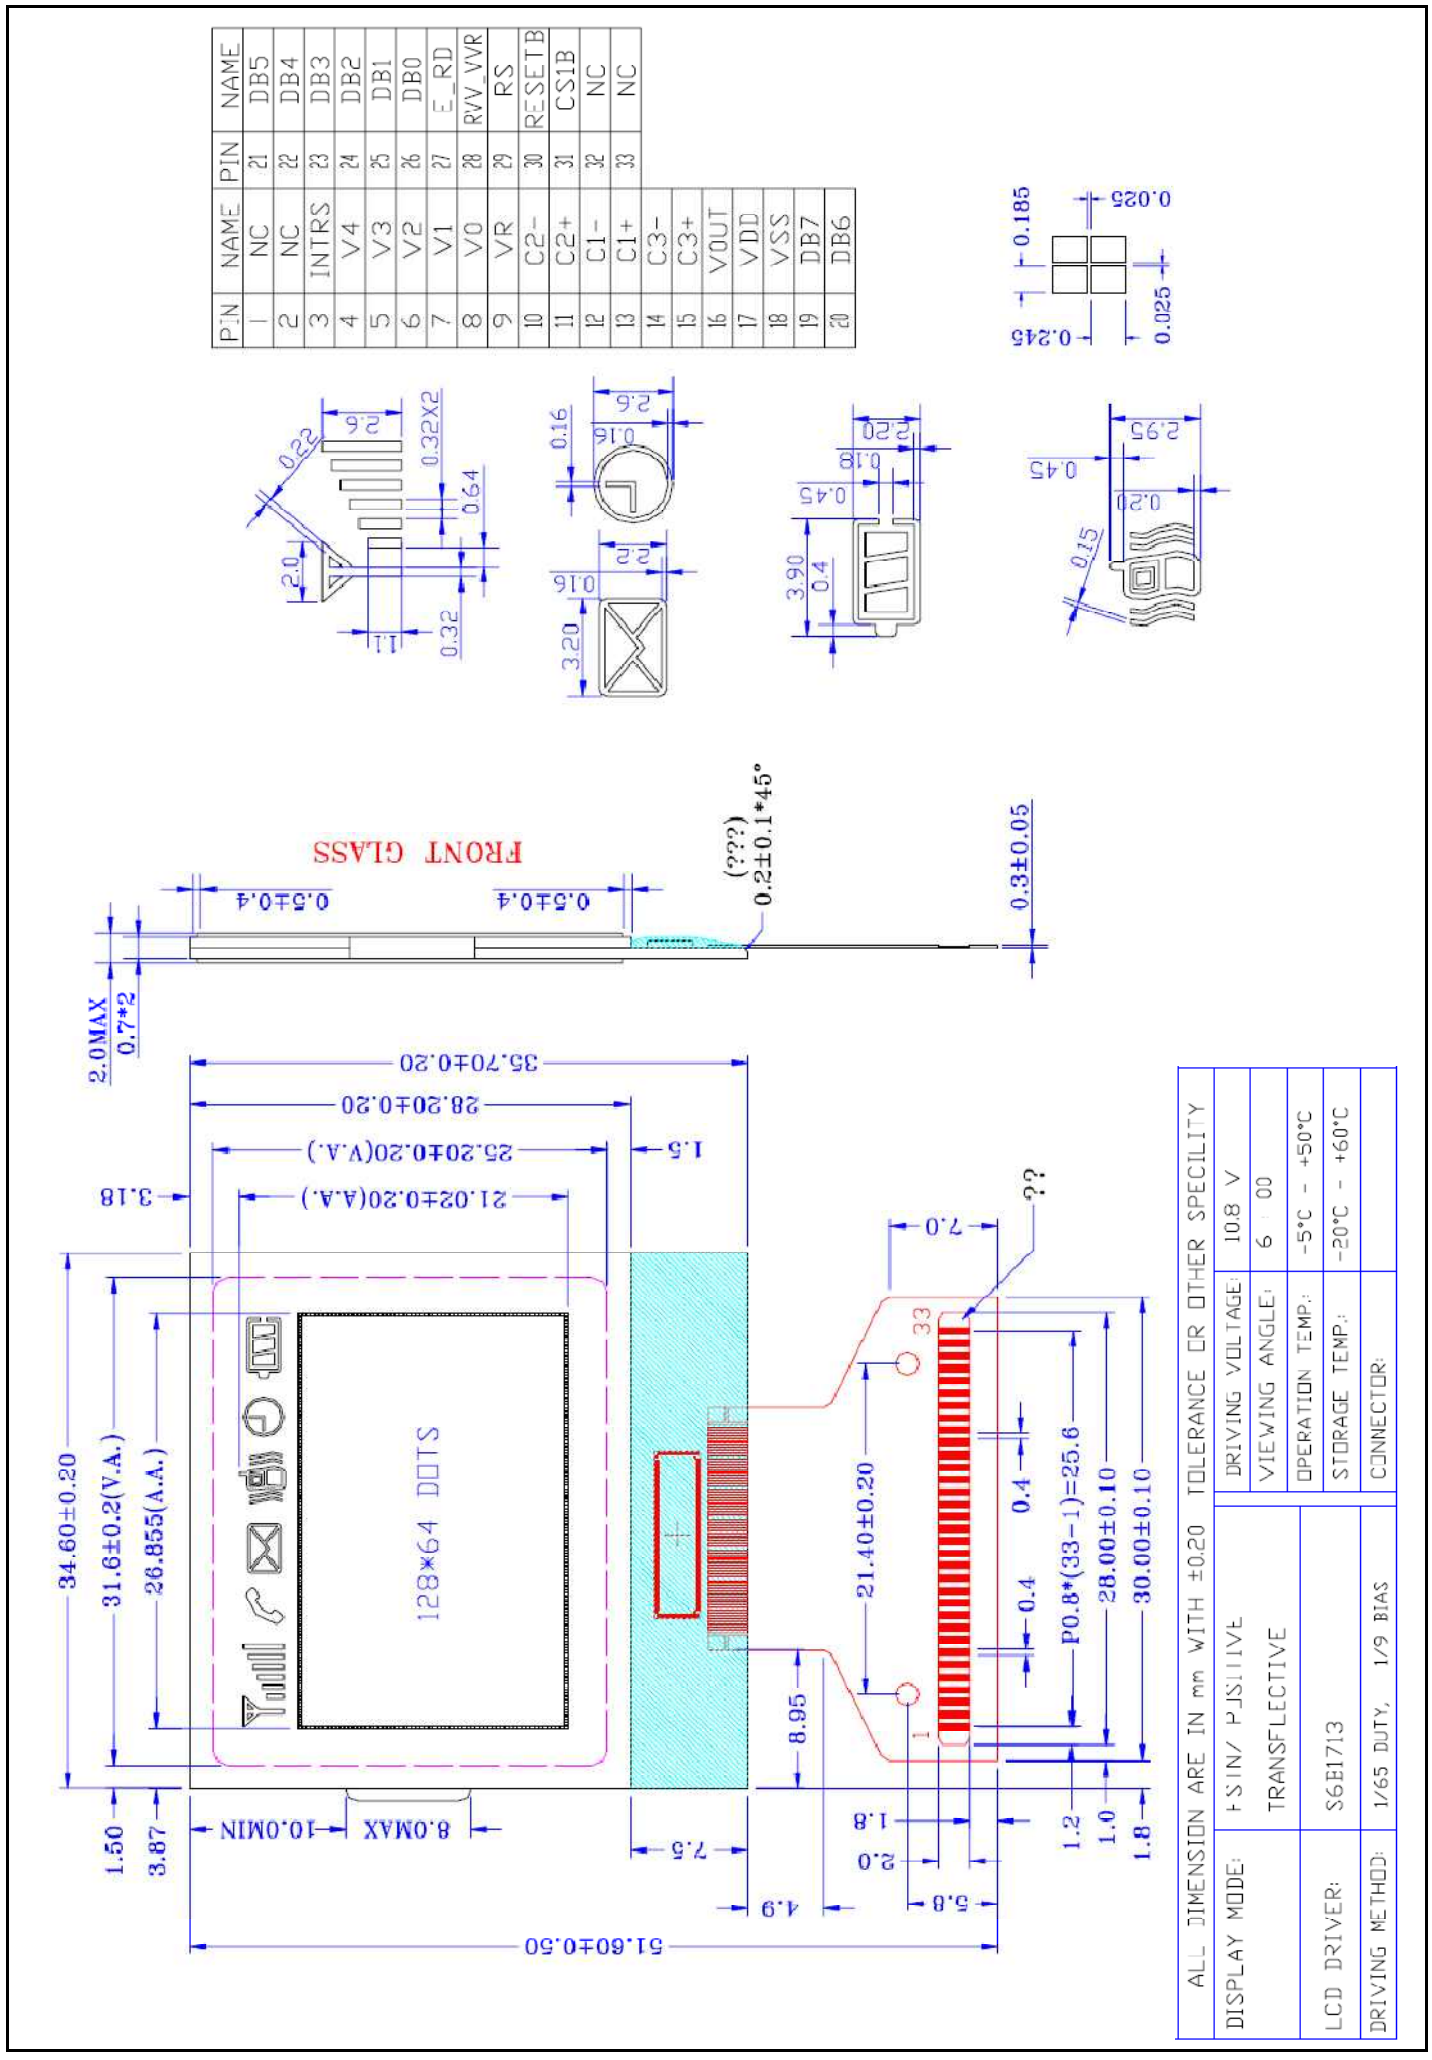
PIN NAME PIN NAME
1 NC 21 DB5
2 NC 22 DB4
3 INTRS 23 DB3
4 V4 24 DB2
5 V3 25 DB1
6 V2 26 DB0
7 V1 27 E_RD
8 V0 28 R/W_VWR
9 VR 29 RS
10 C2- 30 RESETB
11 C2+ 31 CS1B
12 C1- 32 NC
13 C1+ 33 NC
14 C3-
15 C3+
16 VOUT
17 VDD
18 VSS
19 DB7
20 DB6
FRONT GLASS
128*64 DOTS
ALL DIMENSION ARE IN mm WITH ±0.20 TOLERANCE OR OTHER SPECILITY
DISPLAY MODE: +SIN/ POSITIVE
TRANSFLECTIVE
LCD DRIVER: S6E1713
DRIVING METHOD: 1/65 DUTY, 1/9 BIAS
DRIVING VOLTAGE: 10.8 V
VIEWING ANGLE: 6 : 00
OPERATION TEMP.: -5°C ~ +50°C
STORAGE TEMP.: -20°C ~ +60°C
CONNECTOR: