



PIN FUNCTION

NO.	SYMBOL NO.	SYMBOL
1	NC	CAP1-
2	/CS1	CAP1+
3	/RES	CAP2+
4	A0	CAP2-
5	D6(SCL)	V1
6	D7(SI)	V2
7	Vdd	V3
8	VSS	V4
9	VOUT	V0
10	CAP3+	NC

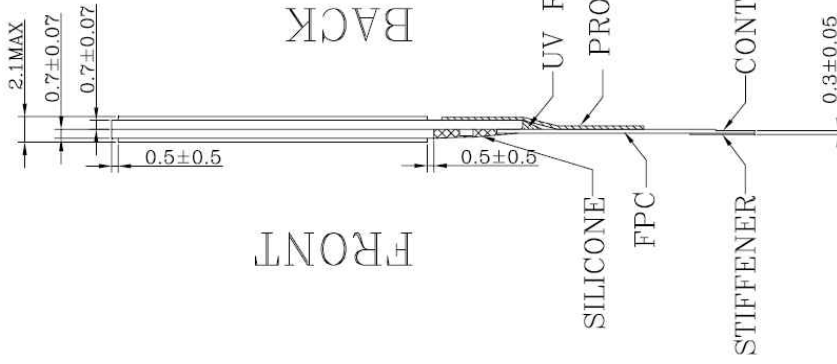

DETAIL DOTS

- NOTES:
1. DISPLAY TYPE:FSTN
 2. VIEWING DIRECTION:12 O' CLOCK
 3. POLARIZER MODE:TRANSFLECTIVE/POSITIVE
 4. DRIVE METHOD:1/65DUTY 1/9BIAS
 5. LCD DRIVING VOLTAGE:8.8V
 6. LOGIC POWER SUPPLY VOLTAGE:3.0V
 7. OPERATING TEMP:-20 °C TO +70 °C
 8. STORAGE TEMP:-30 °C TO +80 °C
 9. CONTROLLER IC:NT7532H-BDT
 10. CONNECTOR TYPE:COG+FPC