
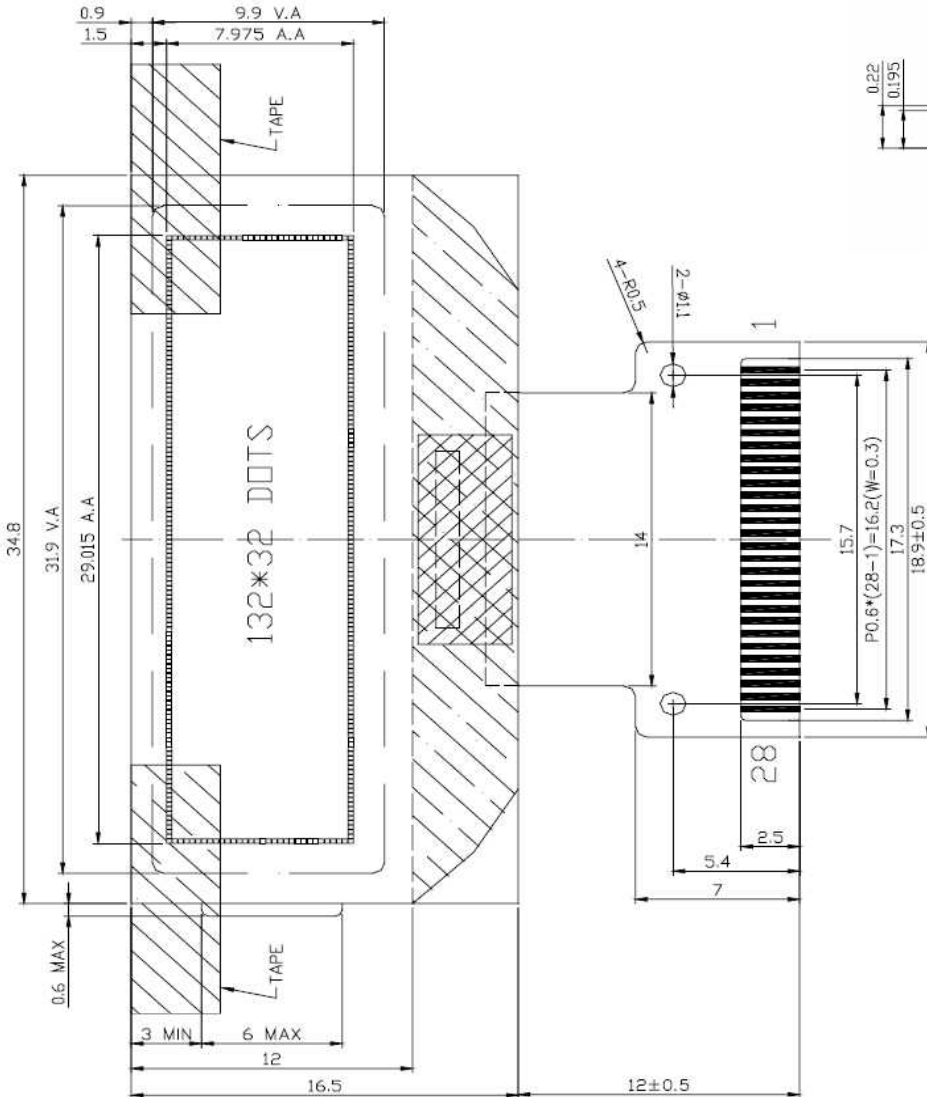


PIN FUNCTION

NO.	SYMBOL	PIN FUNCTION
1	VDD	
2	C86	
3	VSS	
4	V0	
5	V4	
6	V3	
7	V2	
8	V1	
9	CAP2-	
10	CAP2+	
11	CAP1+	
12	CAP1-	
13	CAP3+	
14	VOUT	
15	VSS	
16	D7	
17	D6	
18	D5	
19	D4	
20	D3	
21	D2	
22	D1	
23	D0	
24	/RD	
25	/WR	
26	A0	
27	/RES	
28	/CSI	

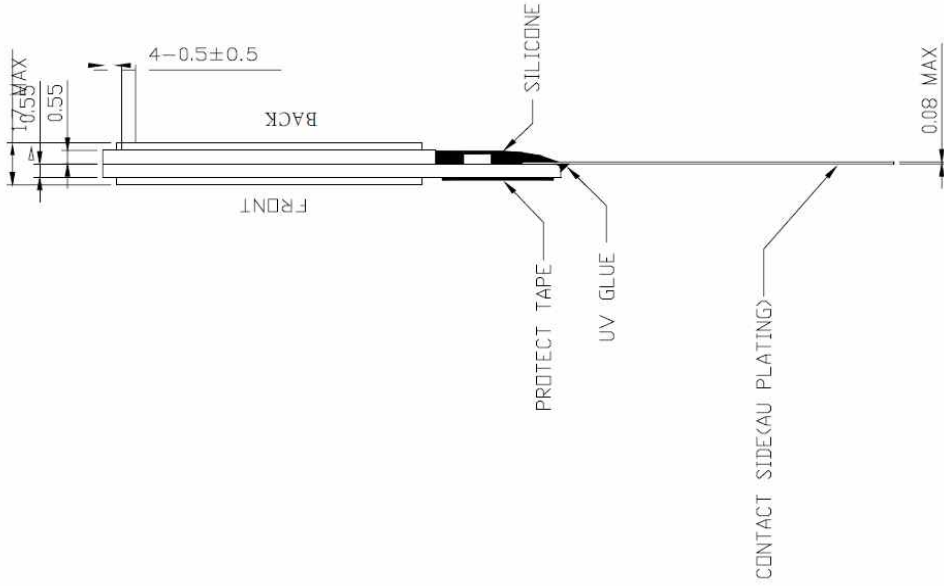

DETAIL DOT
SCALE:10/1

- NOTES:
1. DISPLAY TYPE: FSTN
 2. VIEWING DIRECTION: 6 O'CLOCK
 3. DRIVE METHOD: 1/33DUTY 1/6BIAS
 4. POLARIZER MODE: TRANSPARENT/POSITIVE
 5. LCD DRIVE VOLTAGE: 8.2V
 6. OPERATING TEMP: -20°C--+70°C
 7. STORAGE TEMP: -30°C--+80°C
 8. DRIVER/CONTROLLER IC: NT7534H-BDT
 9. LOGIC POWER SUPPLY VOLTAGE: 3.0V
 10. CONNECTION TYPE: FPC