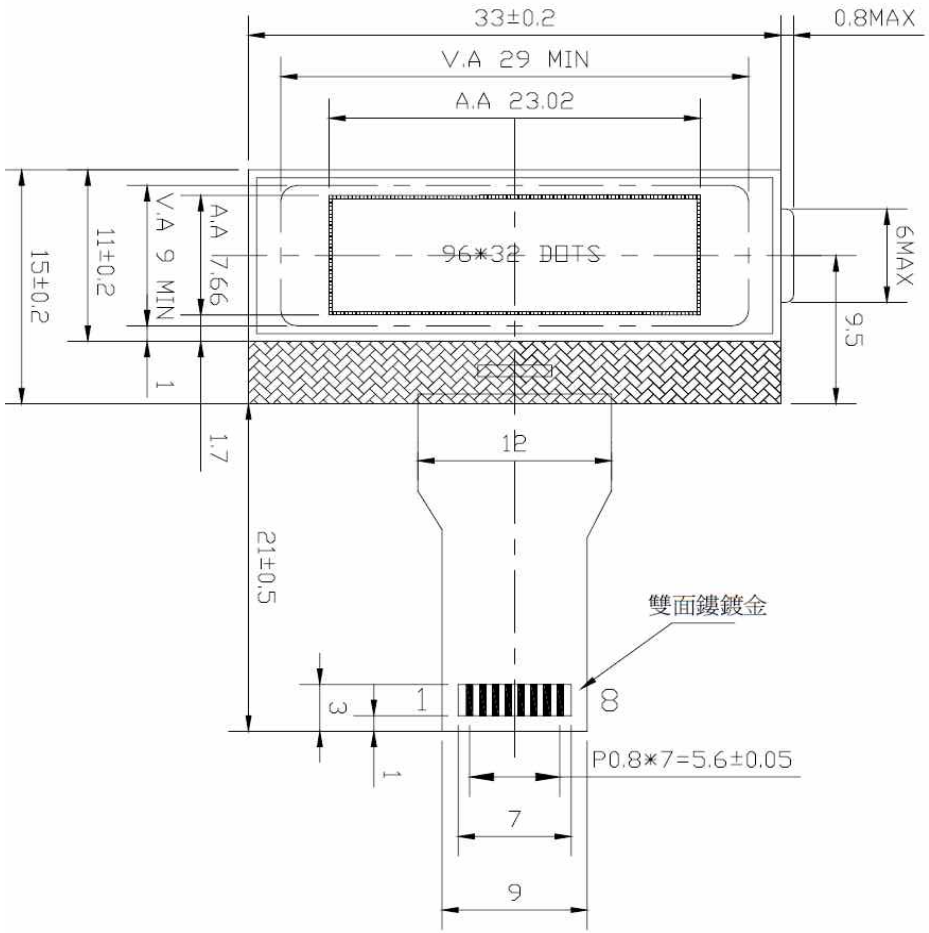

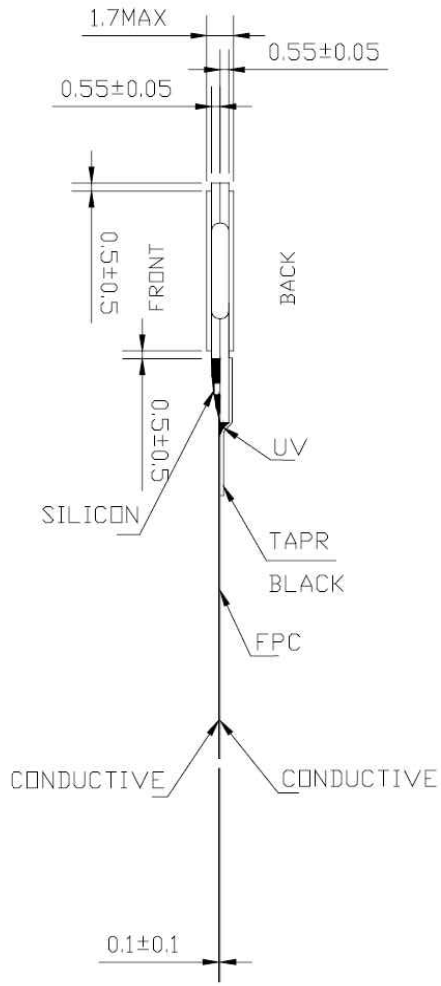

PIN	NAME
1	VOUT
2	Vss
3	SCLK
4	SDA
5	A0
6	CSB
7	RESB
8	VDD



DETAIL DOTS:
SCALE 10

6 O'CLOCK VIEWING DIRCTION

NOTES:
1. DISPLAY TY
2. VIEW DIRECTION:6 O CLOCK
3. POLARIZER TYPE:TRANSFLECTIVE/POSITIVE
4. DRIVER METHOD:1/33 DUTY 1/7 BIAS
5. LCD DRIVING VOLTAGE:6.0V
6. LOGIC SUPPLY VOLTAGE:3.0V
7. OPERATING TEMP:-10°C~+60°C
8. STORAGE TEMP:-20°C~+70°C
9. CONTROLLER/DRIVE IC:ST7549T
10. CONNECTOR TYPE:COG+FPC
11. OTHER TOLERANCE:±0.2

JGY9632C0FSN-06