
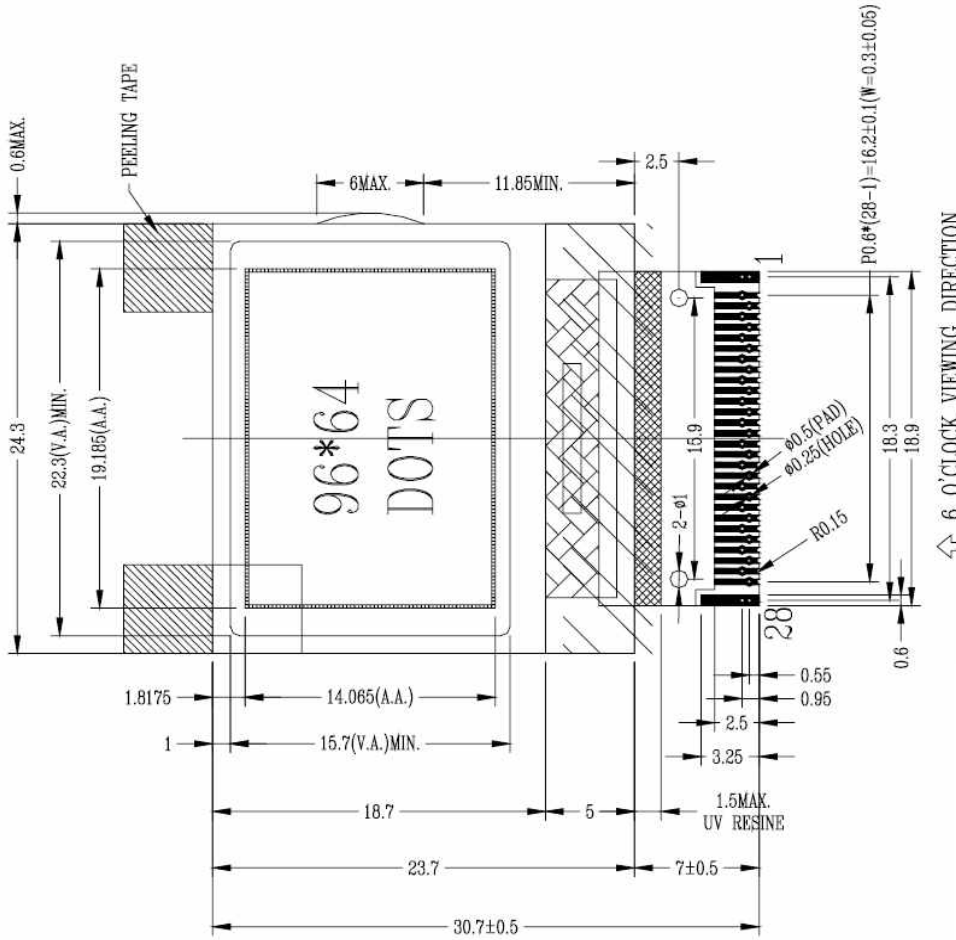


PIN FUNCTION

NO.	SYMBOL
1	VDD
2	C86
3	VSS
4	V0
5	V4
6	V3
7	V2
8	V1
9	CAP2-
10	CAP2+
11	CAP1+
12	CAP1-
13	CAP3+
14	VOUT
15	VSS
16	D7
17	D6
18	D5
19	D4
20	D3
21	D2
22	D1
23	D0
24	/RD
25	/WR
26	A0
27	/RES
28	/CS1

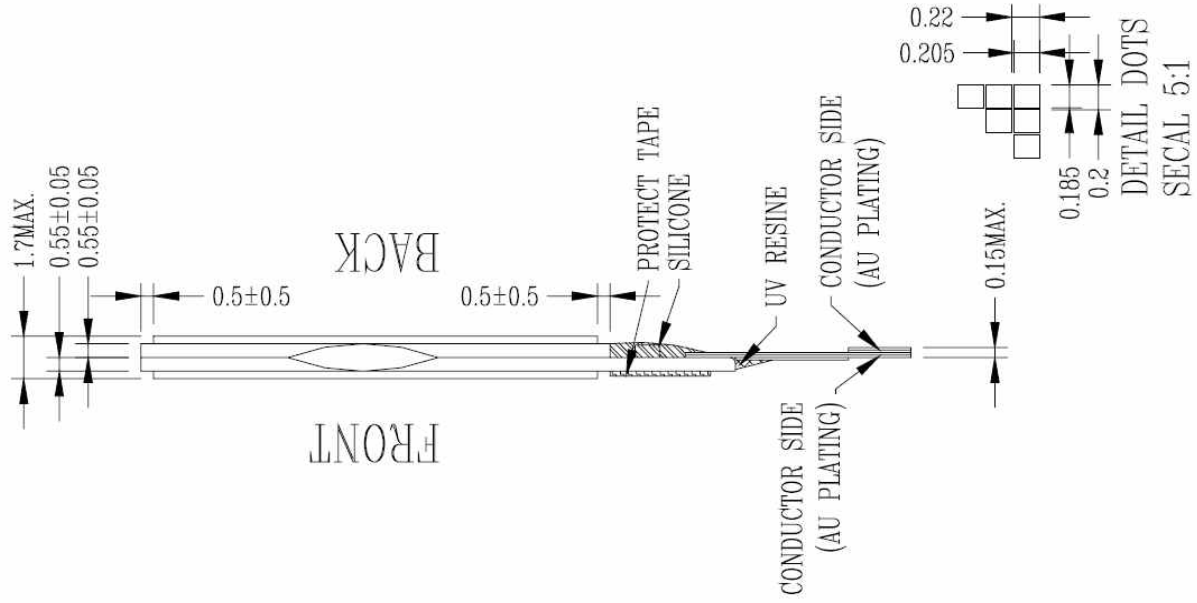

- NOTES:
1. DISPLAY TYPE: FSTN
  2. VIEWING DIRECTION: 6 O'CLOCK
  3. POLARIZER MODE: TRANSPARENTIVE/POSITIVE
  4. DRIVE METHOD: 1/65DUTY 1/9BIAS
  5. LCD DRIVING VOLTAGE: 9.0V
  6. LOGIC POWER SUPPLY VOLTAGE: 3V
  7. OPERATING TEMP.: -20°C TO +70°C
  8. STORAGE TEMP.: -30°C TO +80°C
  9. CONTROLLER IC: NT7534H-BDT
  10. CONNECTOR: FPC
  11. TOLERANCE: ±0.2