



FPC接口


1	NC	16	WR0
2	VLCD	17	RST
3	VS+	18	D0
4	VS-	19	D1
5	VB0-	20	D2
6	VB1-	21	D3
7	VB1+	22	D4
8	VB0+	23	D5
9	VDD	24	D6
10	VSS	25	D7
11	TST4	26	D8
12	BM0	27	D13
13	CS0	28	D15
14	CD	29	NC
15	WR1		



DOTS DETAIL



LCD LAYOUT




Front

Silicone

Protect tape

Contact side

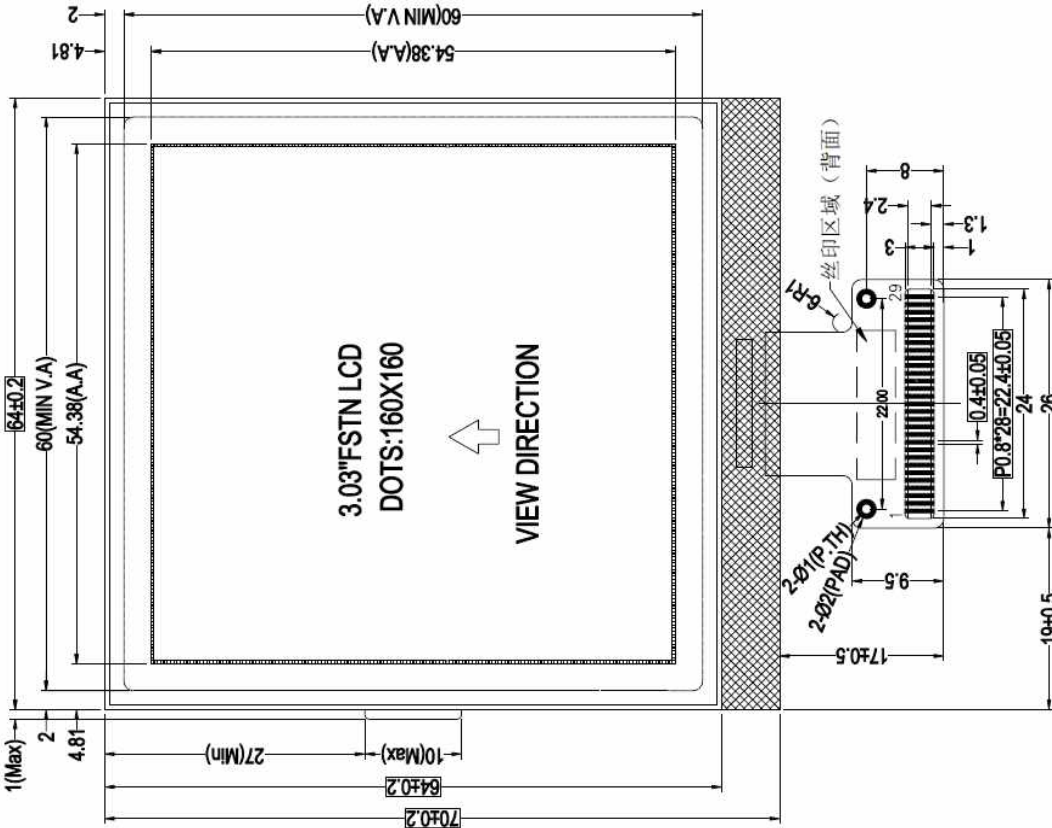

3.03" FSTN LCD
DOTS: 160X160

VIEW DIRECTION

NOTES:

1. DISPLAY TYPE: FSTN
2. VIEWING DIRECTION: 6:00
3. POLARIZER MODE: TRANSPARENT/POSITIVE
4. DRIVE METHOD: 1/160 DUTY, 1/10 BIAS
5. OPERATING VOLTAGE: 16.5V
6. OPERATING TEMP.: VDD=3.3V
7. STORAGE TEMP.: -40°C~+70°C
8. IC: UC1698U
9. CONNECTOR: FPC
10. UNMARKED TOLERANCE: ±0.3mm
11. REQUIREMENTS ON ENVIRONMENT PROTECTION: Q/S0002(R&HS requirements contained).